

Matching accessory for E-DAT Industry IP20 RJ45 field plug black


	Page
Industry color coding ring field plug orange	269
Industry color coding ring field plug light grey	269
Industry color coding ring field plug white	269
Industry color coding ring field plug yellow	269
Industry color coding ring field plug blue	269
Industry color coding ring field plug green	269




E-DAT modul

- modular termination unit RJ45
- certified to GHMT Cat.6 de-embedded PVP
- compliance with class E_A to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- tested: Link up to 500 MHz
- for 10 GBit Ethernet (IEEE 802.3an)
- suitable for Power over Ethernet (PoE, PoE plus and UPoE)
- easy to install connection of 2 to 4 pair data lines
- AWG 24/1 - 22/1 and stranded wires with 7 copper conductors AWG 26/7 to BTR 8-fold insulation displacement connectors (IDC)
- marking of conductor assignment to T568A or T568B
- easy and fast insertion of wire pairs in E-DAT modul stuffer cap
- module housing made of refined zinc die-casting
- mounting without special tools
- strain relief with cable tie at the module
- mounting version: Modul
- cable feed 180°

BTR module cut-out



Dimensional drawing




P/N	Color	Feature 1	Feature 2	EAN
130910-1		Cat.6 T568A	BTR module cut-out	4250184105473



E-DAT Industry IP20 RJ45 field plug black

- multi-port Cat.6 class E_A plug to be assembled in the field
- compliance with class E_A to ISO/IEC 11801 Ed.2.2:2011-06, DIN EN 50173-1:2011-09
- 10 GBit suitable according to IEEE 802.3an
- 8-wire RJ45 plug for AWG 22 to be assembled in the field
- connection of AWG 26/7 - 22/7; AWG 24/1 - 22/1 possible
- solid copper wire diameter from 0.4 to 0.64 mm
- stranded copper wire diameter from 0.48 to 0.76 mm
- conductor diameter up to 1.6 mm
- cable jacket from 5.5 to 8.5 mm
- consists of only 2 parts
- easy assembly - connection without special tools
- during mounting, the cable is mechanically fastened to the stuffer cap
- easy to actuate strain relief
- strain relief can be snapped on after assembly as color coding
- zinc die-cast housing for industrial use
- protected locking hook
- can be used as test plug on IP67 protected jacks of variants 1, 4, 5, 6 and 14

Dimensional drawing

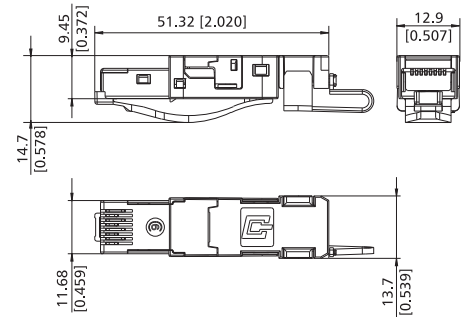

P/N	Color	Feature 1	Feature 2	EAN
1401405012-1	black	8(8) field plug	two parts	4250184113881